



SUB SERIES

SUBMERSIBLE TRANSFER & DRAINAGE PUMPS



SUB series1



SUB series2

SUB 1 FEATURES

- 1> Thermoplastic Cover
- 2> Aluminium Body
- 3> Stainless Steel shaft
- 4> Insulation Class B/F
- 5> Protection Class IP68
- 6> Automatic level switch
- 7> 6M cable

SUB 2 FEATURES

- 1> Stainless Steel Cover
- 2> Stainless Steel Body
- 3> Stainless Steel shaft
- 4> Insulation Class B/F
- 5> Protection Class IP68
- 6> Thermal protection
- 7> Automatic level switch
- 8> 6M cable

AUSFLOW KAP SERIES

Ausflow SUB Series submersible pumps are the ideal solution for operating water features, general watering and sump drainage. The Ausflow SUB Series are corrosion resistant, compact, light weight and easy to operate. The pumps operate automatically utilising the inbuilt level switch. The SUB2 Series are protected from overheating, ensuring safe and reliable running under extreme conditions.




Clear Solutions Every Time



SUB SERIES


SUB1 SERIES PERFORMANCE

MODEL	HP	FLOW lpm	HEAD M	OUTLET mm	L mm	W mm	H mm	WEIGHT Kg
AUSFLOW SUB1055	0.55	25	17	25	300	195	165	7
AUSFLOW SUB1075	0.75	50	18	25	385	270	240	9.5
AUSFLOW SUB1100	1.00	25	32	25	420	240	220	13.5
AUSFLOW SUB1101	1.00	135	18	40	405	200	220	11.5
AUSFLOW SUB1102	1.00	250	10	50	405	200	220	12

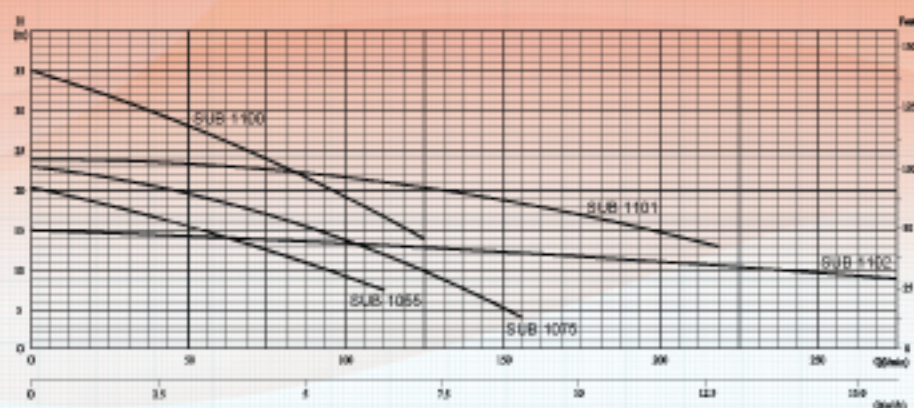

SUB2 SERIES PERFORMANCE

MODEL	HP	M FLOW lpm	M HEAD M	OUTLET mm	L mm	W mm	H mm	WEIGHT Kg
AUSFLOW SUB2150	1.50	335	20	50	210	210	450	15
AUSFLOW SUB2200	2.00	415	25	50	210	210	465	16
AUSFLOW SUB2300	3.00	500	38	65	210	210	540	28

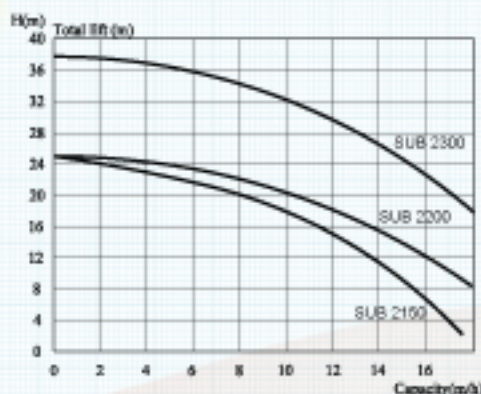

Accredited Dealer



*Aquionics are constantly developing new products and improving current designs. Current production may vary from the product shown on this brochure.

www.aquionics.net